


DGA Mach VII™ Permanent Disc Golf Basket Specification Sheet

The Mach VII disc golf basket is the perfect choice for college campuses, city and state parks, high use disc golf courses and for Championship tournament play.

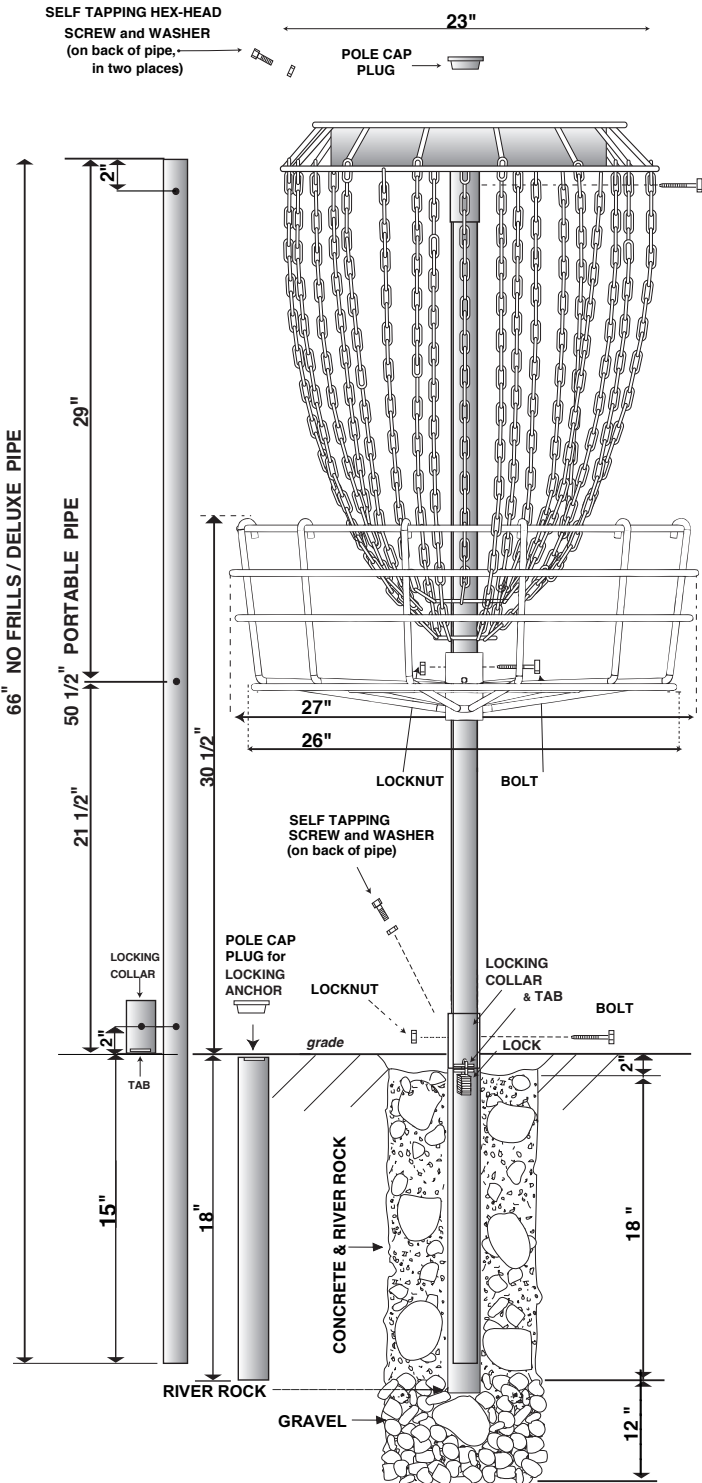

POLE (66 in.) - 1 15/16 in. O.D. hot-dipped galvanized pipe, drilled.

POLES - The holes closest to one end of the pole are for the Chain Assembly. This end should also have a Pole Cap Plug. The middle set of holes are for the Basket Assembly. The bottom set of holes are for the Locking Collar for Standard Mach Basket with anchor & Collar.

CHAIN ASSEMBLY - 9 mm steel rod, welded and hot-dipped galvanized. 14 outer sliding links and chains, 7 midway slider hooks and chains, 7 inner pipe protectors and chains. All 28 chains assembled with heavy duty "S" hooks to allow freer movement of chains. 6" Sleeve - Bolt, hex head nut and nylon insert locknut, hex head tec screw, internal tooth star lock washer, (will not vibrate loose like one-way screws). Rod Assembly - 3/8 in. steel rod.

SHIELDED VISIBILITY RING - 25 1/2 in. x 2 in. Welded and hot-dipped galvanized. Cast film / Vinyl overlay

CHAIN ASSEMBLY INSTRUCTIONS - Slide Chain Assembly, (ring first), down pole. Align holes in collar with holes at top of pole. Fasten with bolt, hex head nut and nylon insert locknut, hex head tec screw, internal tooth star lock washer, (will not vibrate loose like one-way screws).

TRAPPER BASKET 2 ASSEMBLY - 9mm steel rod, welded and hot-dipped galvanized. 6" Sleeve - bolt, hex head nut and nylon insert locknut, hex head tec screw, internal tooth star lock washer, (will not vibrate loose like one-way screws).

TRAPPER BASKET 2 ASSEMBLY INSTRUCTIONS - Slide Basket Assembly down pole, (basket facing up), until holes in collar align with holes in middle of pole. Fasten with bolt, hex head nut and nylon insert locknut, hex head tec screw, internal tooth star lock washer, (will not vibrate loose like one-way screws).

*STANDARD MACH BASKET (LOCKABLE ANCHOR & COLLAR)
LOCKING COLLAR - Welded and hot-dipped galvanized. 4" Collar- 2 1/8" Tubing. Bolt, hex head nut and nylon insert locknut, hex head tec screw, internal tooth star lock washer, (will not vibrate loose like one-way screws).

LOCKING COLLAR ASSEMBLY INSTRUCTIONS - Slide the locking collar, with the locking tab at the bottom of collar, up pole to bottom set of holes. Align holes in locking collar with holes in pole and fasten with bolt, hex head nut and nylon insert locknut, hex head tec screw, internal tooth star lock washer, (will not vibrate loose like one-way screws). After the locking collar is fastened, the pole can be placed in anchor to complete installation.

***Note: The LOCKING TAB should always be pointing at the tee.**

ANCHOR -18 in. x 2 1/8 in. O.D. pipe, drilled. Install flush to ground with matching Locking Tab aiming at the tee.

CONCRETE & RIVER ROCK (Used to stabilize Anchor until cement sets) - Approximately 1 cubic foot (concrete, river rock and lock not furnished)
CAUTION: Let concrete settle 1 week before installing